

Measuring Glucose Content in Aqueous Solutions by means of Split Ring Resonator (SRR) Loaded Transmission Lines

P Vélez, J Muñoz, J Mata-Contreras, David Dubuc, Katia Grenier, Ferran Martin

► **To cite this version:**

P Vélez, J Muñoz, J Mata-Contreras, David Dubuc, Katia Grenier, et al.. Measuring Glucose Content in Aqueous Solutions by means of Split Ring Resonator (SRR) Loaded Transmission Lines. 12th International Congress on Artificial Materials for Novel Wave Phenomena – Metamaterials 2018, Aug 2018, Espoo, Finland. 3p. hal-01951424

HAL Id: hal-01951424

<https://hal.laas.fr/hal-01951424>

Submitted on 9 Dec 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Measuring Glucose Content in Aqueous Solutions by means of Split Ring Resonator (SRR) Loaded Transmission Lines

P. Vélez¹, J. Muñoz¹, J. Mata-Contreras², D. Dubuc³, K. Grenier³, F. Martín¹

¹ CIMITEC, Universitat Autònoma de Barcelona, 08193 Bellaterra, Barcelona, Spain

² Departamento de Ingeniería de Comunicaciones, Universidad de Málaga, 29016 Málaga, Spain

³ National Scientific Research Center, Laboratory of Analysis and Architecture of Systems (LAAS-CNRS),

Université de Toulouse, CNRS, UPS, 31400 Toulouse, France

E-mail: Paris.Velez@uab.cat

***Abstract* – It is shown in this paper that a pair of uncoupled microstrip lines each one loaded with a split ring resonator (SRR) in a symmetric configuration is useful to measure the solute content in very diluted solutions. The principle of operation of this microwave sensor is symmetry disruption, achieved by loading one of the SRRs with the solvent (reference liquid) and the other one with the solution (liquid under test –LUT). To this end, the structure is equipped with a pair of fluidic channels. The output variable of this sensor is the cross-mode insertion loss (in linear form), very sensitive to small perturbations between the reference liquid and the liquid under test. The structure, applied to the measurement of glucose concentration in deionized (DI) water, is able to resolve glucose concentrations of 2.5g/L and the maximum sensitivity is 0.0036 (g/L)⁻¹.**

I. INTRODUCTION

Metamaterial-inspired resonant elements, such as the split ring resonator (SRR) and other related resonators, are electrically small resonators formerly used for the implementation of bulk metamaterials, planar metamaterials and metamaterial transmission lines [1]. Such metamaterial-inspired resonators are very sensitive to the surrounding medium and are therefore useful for the implementation of sensing elements able to monitor the properties of such medium. Particularly, metamaterial resonators are of interest for the measurement of the complex dielectric constant of solids [2]-[5] and liquids [6]-[8]. Most implementations are based on the variation of the notch frequency and depth experienced by a transmission line loaded with these resonators [2]-[4],[6], caused by the material under test (or liquid under test –LUT), when it is put in close proximity, or in contact, with the sensing resonator. In other implementations, symmetry disruption is the sensing principle [5],[8]. In this case, major robustness against cross sensitivities caused by environmental factors (temperature, humidity, etc.) is achieved, as long as symmetry is invariant under changes in ambient factors (which may take place at a scale much larger than resonator's dimensions).

Among the microwave sensors based on symmetry disruption, coupling modulation sensors [9] and frequency splitting sensors [5],[8] have been reported. In the first category, symmetry disruption leads to a variation of the electromagnetic coupling between a transmission line and the resonant element, which in turn modulates the transmission coefficient. Hence, the variable of interest can be measured from the maximum excursion experienced by the transmission coefficient (notch magnitude [9]), or from the amplitude variation of an injected harmonic signal at the output port [10]. Although coupling modulation sensors can be applied to dielectric characterization, they have been mainly oriented to the measurement of spatial variables or velocities [10], since line-to-resonator coupling is very dependent on the relative orientation/position between these elements. In frequency splitting sensors, a transmission line structure is symmetrically loaded with a pair of resonant elements, thus generating a notch [5],[8]. The operating principle in this case is the frequency splitting that appears when the resonators are asymmetrically loaded. These sensors have been applied to the dielectric characterization of liquids [5],[8], but their resolution is limited. To be able to resolve very small perturbations, an approach based on the measurement of the cross-mode insertion loss of a pair of symmetric uncoupled lines

each one loaded with a resonant element (an open complementary split ring resonator) was first presented in [11]. In this paper we report a sensing structure based on a pair of microstrip lines loaded with SRRs, which is applied to the measurement of glucose concentration in diluted aqueous solutions.

II. THE SENSING STRUCTURE

The proposed sensing structure is composed by the pair of SRR-loaded lines (etched on a commercial microwave substrate), plus the fluidic channels and the necessary mechanical accessories for liquid injection. The layout of the pair of SRR loaded lines and the photograph of the fabricated sensor are depicted in Fig. 1, where the relevant dimensions are indicated, as well as the regions where a dry film is deposited in order to avoid substrate absorption. The considered substrate is the FR4 with dielectric constant, loss tangent, and thickness of $\epsilon_r = 4.4$, $\tan\delta = 0.02$ and $h = 1.6$ mm respectively. Concerning the fluidic and mechanical parts of the sensor, the fluidic channel has been implemented by means of polydimethylsiloxane (PDMS), and channel dimensions are: height $h_{ch} = 1.5$ mm, width $w_{ch} = 4.6$ mm, and length $l_{ch} = 26$ mm (Fig.1 c). The mechanical parts are based on a polyether ether ketone (PEEK) structure, which has been designed to accommodate the fluidic connectors for liquid injection in a controllable way through a syringe.

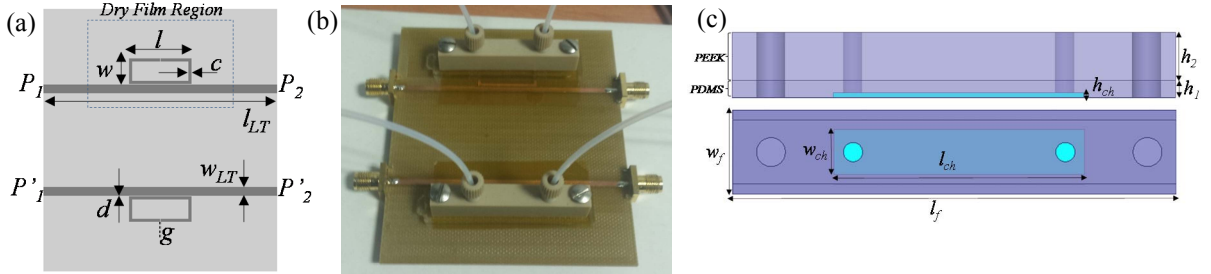


Fig. 1. Layout of the sensor metallic pattern (a), photograph of the fabricated device (b) and lateral and top views of the mechanical and fluidic parts (c). Dimensions are (in mm): $w = 8.17$, $l = 20$, $c = 1$, $d = 0.2$, $g = 0.2$, $l_{LT} = 75$, $w_{LT} = 2.98$, $h_1 = 3.5$, $h_2 = 9$, $w_f = 11$ and $l_f = 50$.

Sensing is based on cross-mode conversion, generated by an asymmetric dielectric load of the SRR pair. Thus, if the liquids in each channel are identical, symmetry in the structure is preserved, and the cross-mode transmission coefficient, S_{21}^{DC} , is ideally null. Conversely, if the liquids are different (i.e., they exhibit different dielectric constant), differential-mode to common-mode conversion (and vice versa) arises, and S_{21}^{DC} takes a finite (complex) value. The main advantage of this sensing method, based on the measurement of the cross-mode insertion loss, is resolution and sensitivity. The reason is that S_{21}^{DC} is very sensitive to small perturbations in the symmetry of the structure. Therefore, it is expected that the proposed structure can be applied to the measurement of solute concentration in diluted solutions. For that purpose, the solvent (the reference liquid) is injected to the reference channel, whereas the other channel is filled with the LUT.

III. VALIDATION AND APPLICATION TO GLUCOSE CONCENTRATION MEASUREMENT IN DI WATER

We have measured the cross-mode insertion loss in the structure of Fig. 1 by filling the LUT channel with different solutions of glucose in DI water. In all the cases, the reference channel is filled with pure DI water (the solvent). The results are depicted in Fig. 2(a), where it can be seen that glucose concentrations of at least 2.5 g/L can be resolved. Fig. 2(b) depicts the glucose concentration as a function of the cross-mode insertion loss (in linear form). From these data, we have obtained the following calibration curve,

$$Glu[g/L] = -33271300 \cdot |S_{21}^{DC}|^4 + 4012400 \cdot |S_{21}^{DC}|^3 - 113821.54 \cdot |S_{21}^{DC}|^2 + 941.83|S_{21}^{DC}| \quad (1)$$

which exhibits a correlation coefficient of $R = 0.9989$. The maximum sensitivity is found to be 0.0036 (g/L) $^{-1}$.

We have repeated the measurement of the cross-mode insertion loss for different values of the glucose content, and it has been found that the results are repetitive. Once the calibration curve has been obtained, it can

be used to determine the glucose content from the measurement of the maximum value of the cross-mode insertion loss.

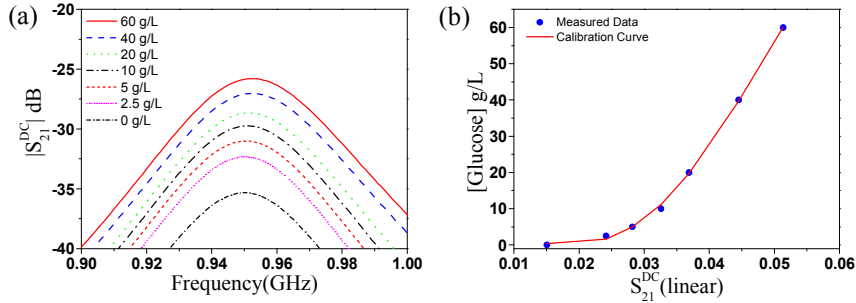


Fig. 2. Cross-mode insertion loss for different values of glucose concentration (a), and variation of the glucose concentration with the maximum value of S_{21}^{DC} (b). The calibration curve is depicted in (b).

IV. CONCLUSION

In conclusion, a sensing structure for monitoring the glucose concentration in diluted aqueous solutions has been reported. The structure uses a pair of uncoupled lines loaded with SRRs and fluidic channels on top of them. Since the cross-mode insertion loss is very sensitive to structure asymmetries, it has been used as output variable in the proposed sensor. The achieved resolution and sensitivity are 2.5 g/L and $0.0036 \text{ (g/L)}^{-1}$.

ACKNOWLEDGEMENT

This work was supported by MINECO-Spain (Project TEC2016-75650-R), by Generalitat de Catalunya (project 2017SGR-1159), by ICREA, and by FEDER funds. The research leading to these results has received funding from the People Programme (Marie Curie Actions) of the Seventh Framework Programme of the European Union (FP7/2007-2013) under REA grant agreement no. 600388 (TECNIOspring programme), and from the Agency for Business Competitiveness of the Government of Catalonia, ACCIÓ (TECSPR15-1-0050).

REFERENCES

- [1] R. Marqués, F. Martín and M. Sorolla, *Metamaterials with Negative Parameters: Theory, Design and Microwave Applications*, Hoboken, NJ, USA, John Wiley, 2007.
- [2] M. S. Boybay and O. M. Ramahi, "Material characterization using complementary split-ring resonators," *IEEE Trans. Instrum. Meas.*, vol. 61, no. 11, pp. 3039–3046, Nov. 2012.
- [3] C.-S. Lee and C.-L. Yang, "Complementary split-ring resonators for measuring dielectric constants and loss tangents," *IEEE Microw. Wireless Compon. Lett.*, vol. 24, no. 8, pp. 563–565, Aug. 2014.
- [4] C.-L. Yang, C.-S. Lee, K.-W. Chen, and K.-Z. Chen, "Noncontact measurement of complex permittivity and thickness by using planar resonators," *IEEE Trans. Microw. Theory Techn.*, vol. 64, pp. 247–257, Jan. 2016.
- [5] L. Su, J. Mata-Contreras, J. Naqui, and F. Martín, "Splitter/combiner microstrip sections loaded with pairs of complementary split ring resonators (CSRRs): modeling and optimization for differential sensing applications," *IEEE Trans. Microw. Theory Techn.*, vol. 64, pp. 4362–4370, Dec. 2016.
- [6] A. Ebrahimi, W. Withayachumnankul, S. Al-Sarawi, D. Abbott, "High-sensitivity metamaterial-inspired sensor for microfluidic dielectric characterization," *IEEE Sensors J.*, vol. 14, pp. 1345–1351, May 2014.
- [7] A. Salim and S. Lim, "Complementary split-ring resonator-loaded microfluidic ethanol chemical sensor," *Sensors*, vol. 16, no. 11, pp. 1–13, 2016.
- [8] P. Vélez, L. Su, K. Grenier, J. Mata-Contreras, D. Dubuc, and F. Martín, "Microwave microfluidic sensor based on a microstrip splitter/combiner configuration and split ring resonators (SRR) for dielectric characterization of liquids," *IEEE Sensors J.*, vol. 17, pp. 6589–6598, Oct. 2017.
- [9] J. Naqui, M. Durán-Sindreu, F. Martín, "Novel sensors based on the symmetry properties of split ring resonators (SRRs)," *Sensors*, vol. 11, no. 8, pp. 7545–7553, Jul. 2011.
- [10] J. Naqui, and F. Martín, "Transmission lines loaded with bisymmetric resonators and their application to angular displacement and velocity sensors," *IEEE Trans. Microw. Theory Techn.*, vol. 61, pp. 4700–4713, Dec. 2013.
- [11] P. Vélez, J. Mata-Contreras, L. Su, D. Dubuc, K. Grenier, F. Martín, "Modeling and analysis of pairs of open complementary split ring resonators (OCSRRs) for differential permittivity sensing", *2017 IEEE MTT-S International Microwave Workshop Series on Advanced Materials and Processes (IMWS-AMP 2017)*, Pavia, Italy, 20-22 Sep. 2017.